

Available Sizes

ROAD VENTURE APT KL51



TIRE SIZE	LI / SS	STAN- DARD RIM	MAX. AIR	MAX. LOAD	SECTION WIDTH		OVERALL DIA.		TREAD DEPTH	
			kpa	kg	mm	inch	mm	inch	mm	x/32"
Black Sidewall										
255/60R18 XL	112V	7.5	340	1120	258	10.2	763	30.0	9.0	11.3
255/55R18 XL	109H	8.0	340	1030	263	10.4	738	29.1	9.7	12.2
235/60R18	103V	7.0	350	875	238	9.4	738	29.1	9.0	11.3
235/55R18	100V	7.5	350	800	243	9.6	715	28.1	9.0	11.3
* P275/65R17	113H	8.0	350	1150	281	11.1	791	31.1	9.7	12.2
* P275/60R17	110H	8.0	350	1060	281	11.1	761	30.0	9.7	12.2
* 275/55R17	109H	8.5	350	1030	290	11.4	734	28.9	9.7	12.2
* P265/70R17	113H	8.0	350	1150	270	10.6	804	31.7	9.7	12.2
P265/65R17	112H	8.0	350	1120	270	10.6	777	30.6	9.7	12.2
* P245/65R17	105T	7.0	350	925	251	9.9	749	29.5	9.7	12.2
P235/65R17	104H	7.0	350	900	238	9.4	738	29.1	9.7	12.2
* 225/55R17	97H	7.0	350	730	239	9.4	680	26.8	9.7	12.2
* P275/70R16	114H	8.0	350	1180	276	10.9	791	31.1	9.7	12.2
* LT265/70R16 8PR	117/114Q	8.0	450	1285/1180	270	10.6	777	30.6	12.0	15.1
* P265/70R16	111T	8.0	350	1120	270	10.6	777	30.6	9.7	12.2
P255/65R16	109H	7.5	350	1030	258	10.2	737	29.0	9.7	12.2
* P255/60R16	104H	7.5	350	875	263	10.4	712	28.0	9.7	12.2
* P245/75R16	109T	7.0	350	1030	246	9.7	774	30.5	9.7	12.2
P245/70R16	107H	7.0	350	975	246	9.7	749	29.5	9.7	12.2
* P235/75R16	106T	6.0	350	950	244	9.6	758	29.8	9.7	12.2
P225/70R16	102T	6.5	350	850	226	8.9	720	28.3	9.7	12.2
265/70R15	112T	8.0	350	1060	270	10.6	751	29.6	9.7	12.2
* LT255/70R15 8PR	112/110S	7.5	375	1120/1060	258	10.2	737	29.0	12.0	15.1
* P235/70R15	102T	7.0	350	860	238	9.4	711	28.0	9.7	12.2
* P225/70R15	100T	6.5	350	795	227	8.9	697	27.4	9.7	12.2
Outlined White Letter										
* P255/65R17	108T	7.5	350	1000	258	10.2	764	30.1	9.7	12.2
235/60R17	102V	7.0	350	850	238	9.4	714	28.1	9.0	11.3
* P265/75R16	114T	7.5	350	1180	265	10.4	804	31.7	9.7	12.2
* P225/75R16	104T	6.0	350	900	227	8.9	744	29.3	9.7	12.2
* P255/70R16	109T	7.5	350	1030	253	10.0	764	30.1	9.7	12.2
235/70R16	106T	7.0	350	925	238	9.4	738	29.1	9.7	12.2
235/60R16 XL	104H	7.0	340	900	238	9.4	688	27.1	9.7	12.2
215/65R16 XL	102H	6.5	340	850	219	8.6	686	27.0	9.7	12.2
255/70R15	108H	7.5	350	1000	258	10.2	737	29.0	9.7	12.2
P235/75R15	105T	6.5	350	920	233	9.2	732	28.8	9.7	12.2
* P225/75R15	102T	6.0	350	850	222	8.7	720	28.3	9.7	12.2

XL: eXtra Load

* * marked sizes will be available in the second half of 2006.


KUMHO TIRES



KUMHO TIRE CO., INC.

Kumho Building, #57, Shinmunro 1-Ga, Jongro-Gu, Seoul, Korea K. P. O Box 1427

Tel : 82-2-6303-8114 Fax : 82-2-6303-8599 <http://www.kumhotire.com>

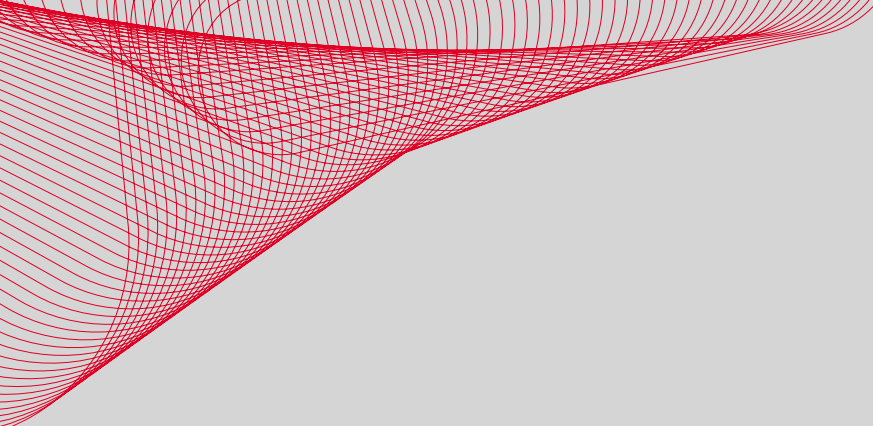

KUMHO TIRES

**ROAD VENTURE APT
KL51**

*Top confidence in change of
the road conditions*



All purpose touring...

- Road Venture APT for all purpose offers the capability and confidence in a variety of driving situations
- Road Venture APT for touring provides driving stability and a comfortable ride
- Road Venture APT for the utility provides good mileage and firm traction

Tread design

1. **Solid center rib :**
Enhances stable driving and offers a comfortable ride at high speeds

2. **4 main radial grooves :**
Improve "Aquaplaning" performance

3. **Wide "Caramel" block rib :**
Provides excellent grip power during acceleration and breaking on both wet and dry condotions

4. **Closed shoulder block :**
Offers lowers noise and stabilizes handling performance at lane change

5. **Z shaped sipes :**
Present a refined image and improve wet and snow performance

Sidewall design

Shark finny decoration :
Presents an aggressive & sharp image



Serration design with solid step :
Assists "Kerb-Crawling" performance and protects the tire from road impact



Vane-shaped decoration :
Shows a dynamic image



• Construction

All season TREAD compound : 1

- Provides enhanced mileage without sacrificing powerful wet and dry traction performance
- Improves stable handling and provides durable performance

Super Absorbent Layer : 2

- Decreases road noise and provides comfortable ride

High tensile steel belt : 4


- Improves high speed durability

3 Endless full cap-ply & edge cap-ply :


- Improves durability and enhances handling performance

5 Optimum ply turn-up height :

- Provides ride comfort

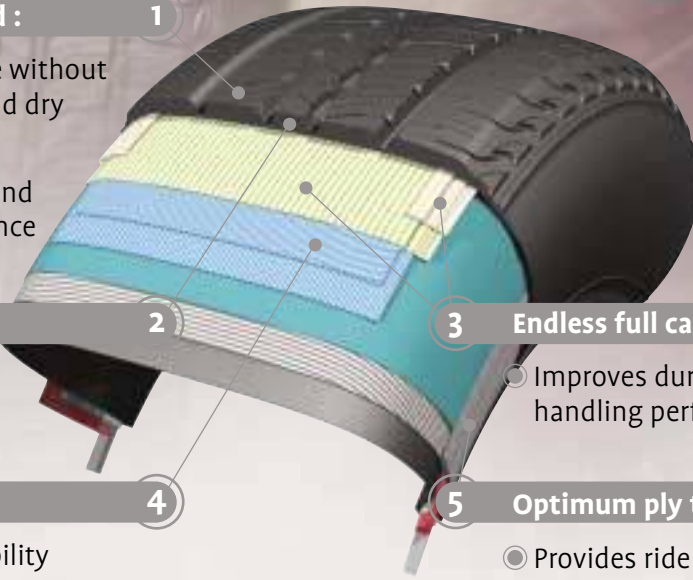

• Performance

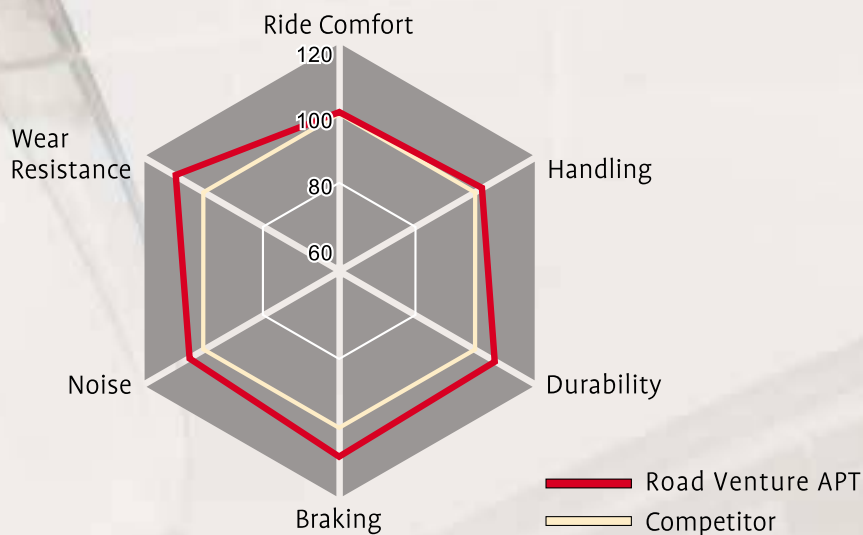

• Aquaplaning

SIZE : P255/65R16

First occurred time of aquaplaning

